

GLADSTONE



QINGDAO GLADSTONE INDUSTRIAL CO.,LTD

T:0086-532-86760839


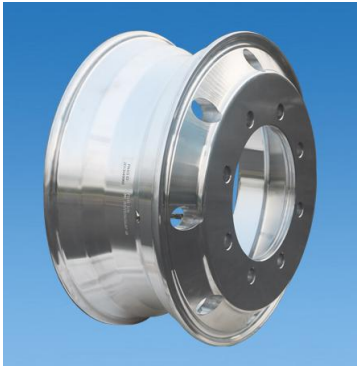
M:0086-15064837919

A:Room 504, No.1166 Li Jiang xi road, Rio Carmo, Qingdao Shandong China.

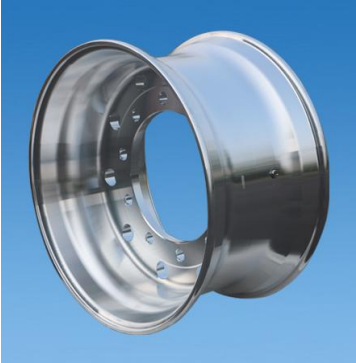

E:info@gladstonetire.com export@gladstonetire.com



Aluminum Wheel

SIZE	PCD HOLES	STUD HOLE DIA. (mm)	P.C.D (mm)	C.B (mm)	OUTSIDE OFFSET (mm)	INSIDE OFFSET (mm)	WEIGHT (kg)	MAXLOAD (KG)	VALVE	TIRE	PICTURE
17.5X6.00	10	26.5	225	176	134	114	14.0	1750	TR543C	8R17.5	
	10	32.5	222.25	164	134	114	14.0	1750			
	6	26.5	222.25	164	134	114	13.3	1750			
	6	32.5	222.25	164	134	114	13.2	1750			
	6	32.5 SR22	222.25	164	134	114	13.2	1750			
	6	21.5	205	160	134	114	13.4	1750			
	5	24	203	146	134	114	13.7	1750			
	5	32.5	203	146	134	114	13.6	1750			
	5	32.5 SR22	203	146	134	114	13.5	1750			
SIZE	PCD HOLES	STUD HOLE DIA. (mm)	P.C.D (mm)	C.B(mm)	OUTSIDE OFFSET (mm)	INSIDE OFFSET (mm)	WEIGHT (kg)	MAXLOAD (KG)	VALVE	TIRE	PICTURE
19.5X7.5	8	24	275	221	157	135	17.4	3000	TR543C	10R19.5	
	8	26.5	275	221	157	135	17.3	3000			
	8	32.5	275	221	157	135	17.2	3000			
	10	26.5	285.75	221	157	135	17.1	3000			

SIZE	PCD HOLES	STUD HOLE DIA. (mm)	P.C.D (mm)	C.B(mm)	OUTSIDE OFFSET (mm)	INSIDE OFFSET (mm)	WEIGHT (kg)	MAXLOAD (KG)	VALVE	TIRE	PICTURE
22.5X8.25	10	26.5	335	281.2	167	142.5	25.9	3650	70MS-7	11R22.5	
	10	32.5	335	281.2	167	142.5	25.7	3650			
	10	32.5 SR22	335	281.2	167	142.5	25.5	3650			
	10	26.5	285.75	221	169	145	25.3	3650			
	10	32.5	285.75	221	169	145	25	3650			
	10	32.5 SR22	285.75	221	169	145	24.8	3650			
	8	32.5 SR22	285	220	169	145	25.7	3650			
	8	32.5 SR22	285	221	169	145	25.7	3650			
SIZE	PCD HOLES	STUD HOLE DIA. (mm)	P.C.D (mm)	C.B(mm)	OUTSIDE OFFSET (mm)	INSIDE OFFSET (mm)	WEIGHT (kg)	MAXLOAD (KG)	VALVE	TIRE	PICTURE
22.5X9.00	10	26.5	335	281.2	176.5	152	25.8	4125	70MS-7	12R22.5	
	10	32.5	335	281.2	176.5	152	25.6	4125			
	10	32.5 SR22	335	281.2	176.5	152	25.4	4125			
	10	26.5	285.75	221	176.5	152	27.5	4125			
	10	32.5	285.75	221	176.5	152	27.3	4125			
	10	32.5 SR22	285.75	221	176.5	152	27.1	4125			
	10	26.5	285.75	220	176.5	152	27.5	4125			
	10	32.5	285.75	220	176.5	152	27.3	4125			
	10	32.5 SR22	285.75	220	176.5	152	27.1	4125			


SIZE	PCD HOLES	STUD HOLE DIA. (mm)	P.C.D (mm)	C.B(mm)	OUTSIDE OFFSET (mm)	INSIDE OFFSET (mm)	WEIGHT (kg)	MAXLOAD (KG)	VALVE	TIRE	PICTURE
22.5X11.75	10	26.5	335	281.2	25	0	24.6	4500	40MS	385/65R22.5	
	10	26.5	335	281.2	145	120	24.6	4500			
	10	26.5	285.75	220	25	0	26.4	4500			
	10	26.5	285.75	220	145	120	26.4	4500			
SIZE	PCD HOLES	STUD HOLE DIA. (mm)	P.C.D (mm)	C.B(mm)	OUTSIDE OFFSET (mm)	INSIDE OFFSET (mm)	WEIGHT (kg)	MAXLOAD (KG)	VALVE	TIRE	PICTURE
22.5X13.00	10	26.5	335	281.2	14	-14	32.5	5200	40MS	425/65R22.5	
	10	26.5	285.75	220	14	-14	34.5	5200			

STEEL TUBELESS WHEEL


SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
16.0X6.0	5	32.5	SR22	203.2	146	125	10	1450	7.5R16	
	6	32.5	SR22	222.25	163	125	10	1450		
SIZE.	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
17.5X6.0	5	29	1*45	203.2	146	130	10/12	1850	8R17.5	
	5	32.5	SR22	203.2	146	130	10/12	1850		
	5	32.5	SR22	208	150	130	10/12	1850		
	6	21	1*45	205	161	130	10/12	1850		
	6	20.5	SR22	190	140	130	10/12	1850		
	6	32.5	SR22	222.25	164	130	10/12	1850		
	10	26	1*45	225	176	130	10/12	1850		
SIZE.	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
19.5X6.75	6	32.5	SR22	222.25	164	140	12	2350	9R19.5	
	8	26	1*45	275	221	140	12	2350		
	8	26	1*45	275	214	140	12	2350		
	8	32.5	SR22	285	221	140	12	2350		
	10	26	1*45	225	176	140	12	2350		

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
22.5X6.00	6	20.5	1*45	190	140	145	12	2800	8R22.5	
	6	32.5	SR22	222.25	164	145	12	2800		
	8	32.5	SR22	275	214	145	12	2800		
	8	32.5	SR22	285	221	145	12	2800		
	10	26	1*45	225	176	145	12	2800		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
22.5X6.75	8	26	1*45	275	221	152	14	2800	9R22.5	
	8	26	1*45	275	214	152	14	2800		
	8	32.5	SR22	285	221	152	14	2800		
	8	32.5	SR22	275	214	152	14	2800		
	10	26	1*45	335	281	156	14	2800		
	10	26	1*45	285.75	220	152	14	2800		
	10	32	SR22	285.75	222	152	14	2800		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
22.5X7.5	8	26	1*45	275	221	165	14	3000	10R22.5	
	8	26	1*45	275	214	165	14	3000		
	8	32.5	SR22	285	221	165	14	3000		
	8	32.5	SR22	275	214	165	14	3000		
	8	32.5	SR22	285	221	110	14	3000		
	10	26	1*45	335	281	165	14	3000		
	10	26	1*45	285.75	220	165	14	3000		
	10	32.5	SR22	285.75	222	165	14	3000		
	10	26	1*45	335	281	110	14	3000		

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
22.5X8.25	8	26	1*45	275	214	169	14	3600	11R22.5	
	8	26	1*45	275	221	169	14	3600		
	8	32.5	SR22	285	221	169	14	3600		
	8	32.5	SR22	285	221	110	14	3600		
	8	32.5	SR22	275	214	169	14	3600		
	10	26	1*45	335	281	169	14	3600		
	10	26	1*45	335	281	110	14	3600		
	10	26	1*45	285.75	220	169	14	3600		
	10	32.5	SR22	285.75	222	169	14	3600		
	demountable rim						120	7		
SIZE.	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
22.5X9.00	8	32.5	SR22	285	221	175	14	4250	12R22.5	
	8	32.5	SR22	285	221	117	14	4250		
	8	32.5	SR22	275	214	175	14	4250		
	10	26	1*45	335	281	175	14	4250		
	10	26	1*45	335	281	117	14	4250		
	10	26	1*45	285.75	220	175	14	4250		
	10	32.5	SR22	285.75	222	175	14	4250		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
22.5X9.75	8	32.5	SR22	285	221	180	14	4250	13R22.5	
	10	26	1*45	335	281	180	14	4250		
	10	26	1*45	285.75	220	180	14	4250		
	10	32.5	SR22	285.75	222	180	14	4250		

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS(mm)	MAXLOAD (KG)	TIRE	PICTURE
22.5X11.75	8	26	1*45	275	221	0	14	3750	15R22.5	
	8	26	1*45	275	221	120	14	3750		
	8	32.5	SR22	285	221	0	14	3750		
	8	32.5	SR22	285	221	120	14	3750		
	10	26	1*45	335	281	0	14	3750		
	10	26	1*45	335	281	120	14	3750		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
24.5X8.25	8	32.5	SR22	285	221	169	14	3600	11R24.5	
	10	26	1*45	335	281	169	14	3750		
	10	26	1*45	285.75	220	169	14	3750		
	10	32.5	SR22	285	221	169	14	3750		

STEEL TUBE WHEEL

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNES S(mm)	MAXLOAD (KG)	TIRE	PICTURE
5.5-16	5	29	1*45	203.2	146	127	10	1550	7.00-16	
	5	29	SR22	203.2	146	127	10	1550		
	5	32.5	SR22	203.2	146	127	10	1550		
	5	32.5	SR22	208	150	127	10	1550		
	6	32.5	SR22	222.25	164	127	10	1550		
	6	20.5	SR22	190	140	127	10	1550		
	6	21	1*45	205	161	127	10	1550		

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNES S (mm)	MAXLOAD (KG)	TIRE	PICTURE
6.0-16	5	29	1*45	203.2	146	130	10	2000	7.50-16	
	5	29	SR22	203.2	146	130	10	2000		
	5	32.5	SR22	203.2	146	130	10	2000		
	5	32.5	SR22	208	150	130	10	2000		
	6	21	1*45	205	161	130	10	2000		
	6	20.5	SR22	190	140	130	10	2000		
	6	32.5	SR22	222.25	164	130	10	2000		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNES S (mm)	MAXLOAD (KG)	TIRE	PICTURE
6.5-16	5	29	1*45	203.2	146	140	12	2000	8.25-16	
	5	29	SR22	203.2	146	140	12	2000		
	5	32.5	SR22	203.2	146	140	12	2000		
	5	32.5	SR22	208	150	140	12	2000		
	6	21	1*45	205	161	140	12	2000		
	6	20.5	SR22	190	140	140	12	2000		
	6	32.5	SR22	222.25	164	140	12	2000		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
6.5-20	6	32.5	SR22	222.25	164	145	14	2400	8.25-20	
	8	26	1*45	275	214	145	14	2400		
	8	26	1*45	275	221	145	14	2400		
	8	32.5	SR22	275	214	145	14	2400		
	8	32.5	SR22	285	221	145	14	2400		
	10	26	1*45	335	281	145	14	2400		
	10	26	1*45	285.75	220	145	14	2400		
	10	32.5	SR22	285.75	222	145	14	2400		

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
7.0-20	8	26	1*45	275	214	162	14	2800	9.00-20	
	8	26	1*45	275	221	162	14	2800		
	8	32.5	SR22	285	221	162	14	2800		
	8	32.5	SR22	275	214	162	14	2800		
	10	26	1*45	335	281	162	14	2800		
	10	26	1*45	285.75	220	162	14	2800		
	10	32.5	SR22	285.75	222	162	14	2800		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
7.5-20	8	26	1*45	275	221	165	14	3200	10.00-20	
	8	26	1*45	275	214	165	14	3200		
	8	32.5	SR22	285	221	165	14	3200		
	8	32.5	SR22	275	214	165	14	3200		
	10	26	1*45	335	281	165	14	3200		
	10	26	1*45	285.75	220	165	14	3200		
	10	32.5	SR22	285.75	222	165	14	3200		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
8.0-20	8	26	1*45	275	221	175	14/16	3350	11.00-20	
	8	26	1*45	275	214	175	14/16	3350		
	8	32.5	SR22	285	221	175	14/16	3350		
	8	32.5	SR22	275	214	175	14/16	3350		
	10	26	1*45	335	281	175	14/16	3350		
	10	26	1*45	285.75	220	175	14/16	3350		
	10	32.5	SR22	285.75	222	175	14/16	3350		

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C. B (mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
8.5-20	8	26	1*45	275	214	175	16	3800	12.00-20	
	8	26	1*45	275	221	175	16	3800		
	8	32.5	SR22	285	221	175	16	3800		
	8	32.5	SR22	275	214	175	16	3800		
	10	26	1*45	335	281	175	16	3800		
	10	26	1*45	285.75	220	175	16	3800		
	10	32.5	SR22	285.75	222	175	16	3800		
SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
9.0-20	8	32	SR22	285	221	180	16	3900	12.00-20	
	10	26	1*45	335	281	180	16	3900		
	10	26	1*45	285.75	220	180	16	3900		
	10	32.5	SR22	285.75	222	180	16	3900		

SIZE	BOLT HOLE QTY.	BOLT HOLE DIA. (mm)	BOLT HOLE TYPE	P.C.D (mm)	C.B(mm)	OFFSET (mm)	THICKNESS (mm)	MAXLOAD (KG)	TIRE	PICTURE
8.5-24	10	26	1*45	335	281	185	16	4100	12.00-24	
	10	26	SR18	335	281	185	16	4100		