

GLADSTONE



QINGDAO GLADSTONE INDUSTRIAL CO.,LTD

T:0086-532-86760839

M:0086-15064837919

A:Room 504, No.1166 Li Jiang xi road, Rio Carnival ,Qingdao Shandong China.

E:info@gladstonetire.com export@gladstonetire.com


GT831A

Features & Benefits



- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Irregular abrasion and cutting resistance compound to achieve longer mileage
- Provide excellent heat dissipation and high speed performance
- With good performance in anti-cracking and tear resistance

Applicable Vehicle Model & Road Condition

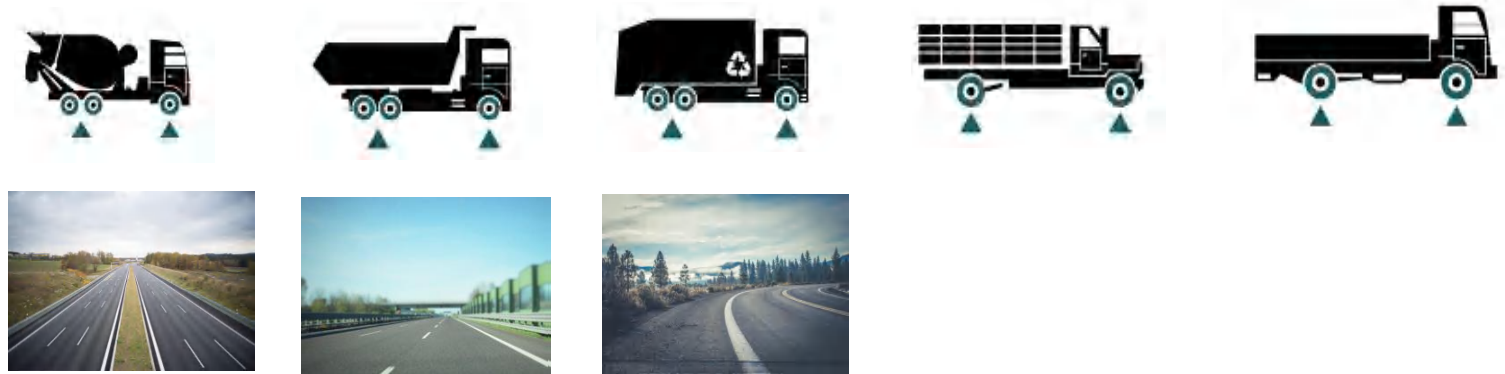


Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
6.50R16LT	12PR	5.50F	K	110	105	1150	1030	770	770	185	750	10
7.00R16LT	14PR	5.50F	L	118	114	1320	1180	770	770	200	775	10.5
7.50R16LT	14PR	6.00G	L	122	118	1500	1320	770	770	215	805	12
8.25R16LT	16PR	6.50H	L	128	124	1800	1600	770	770	235	855	14
8.25R20	16PR	6.5	L	139	137	2430	2300	930	930	236	970	13.5
9.00R20	16PR	7.0	K	144	142	2800	2650	900	900	259	1019	15
10.00R20	18PR	7.5	K	149	146	3250	3000	930	930	278	1054	16
11.00R20	18PR	8.0	K	152	149	3550	3250	930	930	293	1085	16.5
12.00R20	20PR	8.5	K	156	153	4000	3650	900	900	315	1125	17
12.00R24	20PR	8.5	K	160	157	4500	4125	900	900	315	1226	15.5
11R22.5	16PR	8.25	L	146	143	3000	2725	830	830	279	1054	17
11R24.5	16PR	8.25	L	149	146	3250	3000	830	830	279	1104	17
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1084	14.5
13R22.5	18PR	9.75	K	154	151	3750	3450	875	875	320	1124	21.5
315/80R22.5	20PR	9.00	K	156	153	4000	3650	900	900	312	1076	17.5

GT801A

Features & Benefits

Four consecutive main grooves and three auxiliary fine grooves provide outstanding drainage and grip performance.
 Design of pattern block with V type grooves provide better driving steering and driving performance.
 Provide excellent anti-sideslipping performance and ensure excellent water evacuation
 Deliver outstanding traction and handling
 Irregular abrasion and cutting resistance compound to achieve longer mileage
 Provide excellent heat dissipation and high speed performance
 With good performance in anti-cracking and tear resistance

Applicable Vehicle Model & Road Condition

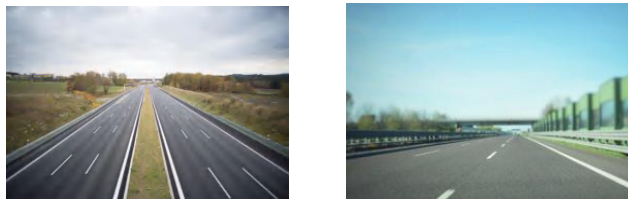

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
215/75R17.5	16PR	6.0	L/M	127	124	1750	1600	830	830	211	767	12.7
235/75R17.5	16PR	6.8	L/M	132	129	2000	1850	830	830	233	797	12.7
12R22.5	18PR	9.0	L	152	149	3550	3250	930	930	300	1085	16.5
295/80R22.5	18PR	9.0	L	152	149	3550	3250	900	900	298	1044	16.5
315/80R22.5	20PR	9	K	156	153	4000	3650	900	900	312	1076	16


GT811

Features & Benefits

Four consecutive main grooves and three auxiliary fine grooves provide outstanding drainage and grip performance.
 Provide excellent anti-sideslipping performance and ensure excellent water evacuation
 Deliver outstanding traction and handling
 Improved tread design, High wear resistance and eccentric wear resistance.
 Low rolling resistance, Save fuel consumption.



Applicable Vehicle Model & Road ondition

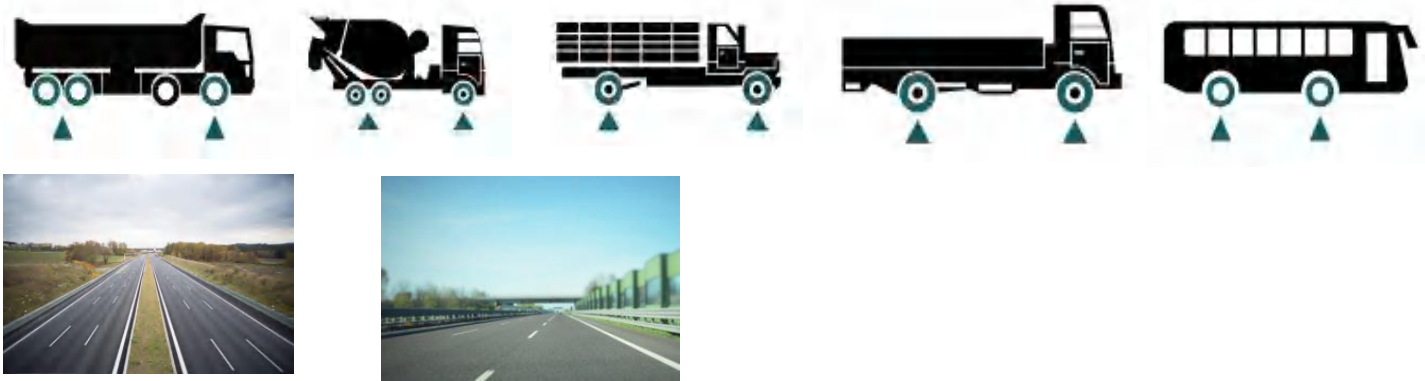

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11R22.5	16PR	8.25	L	146	143	3000	2725	830	830	279	1054	15
11R24.5	16PR	8.25	L	149	146	3250	3000	830	830	279	1104	15
285/75R24.5	16PR	8.25	L	147	144	3075	2800	830	830	283	1050	15
295/75R22.5	16PR	9.00	L	146	143	3000	2725	830	830	298	1014	15
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1085	16
295/80R22.5	18PR	9.00	L	152	149	3550	3250	900	900	298	1044	16
315/80R22.5	20PR	9.00	K	156	153	4000	3650	900	900	312	1076	16


GT891



Features & Benefits

Solid rib design combined with multiple sipes
 Four wide circumferential grooves and Solid shoulder design
 Provide excellent anti-sideslipping performance and ensure excellent water evacuation and self-cleaning performance.
 Deliver outstanding traction and handling
 Improved tread design,High wear resistance and eccentric wear resistance.
 Low rolling resistance,Save fuel consumption.
 Provide excellent heat dissipation and improved regular wear resistance

Applicable Vehicle Model & Road ondition

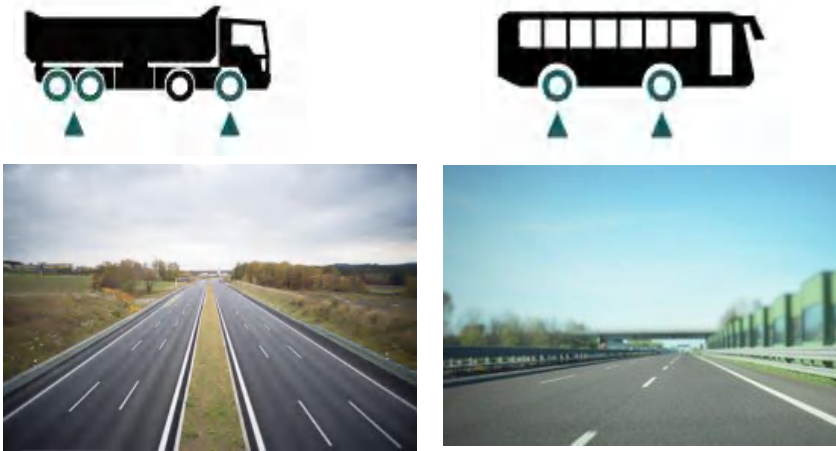

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
295/80R22.5	18PR	9.00	M	152	149	3550	3250	900	900	298	1044	17

897

Features & Benefits

Solid rib design combined with multiple sipes Four wide circumferencial grooves and Solid shoulder design
 Provide excellent anti-sidesliping performance and ensure excellent water evacuation and self-cleaning performance.
 Deliver outstanding traction and handling
 Improved tread design,High wear resistance and eccentric wear resistance.
 Low rolling resistance,Save fuel consumption.
 Provide excellent heat dissipation and improved regular wear resistance

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11R22.5	16PR	8.25	M	146	143	3000	2725	830	830	279	1054	14.5
11R24.5	16PR	8.25	M	149	146	3250	3000	830	830	279	1104	14.5
295/75R22.5	16PR	9.00	M	146	143	3000	2725	830	830	298	1104	15

918

Features & Benefits

4 straight groove can provide superior braking and driving performances,superior adhesion properties of the ground, excellent wet skid resistance,eccentric wear resistance

Deliver outstanding traction and handling

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
385/65R22.5	20PR	11.75	K	160	158	4500	4125	900		389	1072	15

699A

Features & Benefits

Three zigzag grooves design and Combination of rib and lug design on shoulder ensure excellent heat dissipation and high speed performance

Provide outstanding resistance to irregular abrasion

With excellent water drainage and heat dispersion performance

With wide tread design to extend tire service life

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	K	152	149	3550	3250	930	930	293	1085	16
12.00R20	20PR	8.5	K	156	153	4000	3650	900	900	315	1125	16
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1084	16.5

819A

Features & Benefits

Three zigzag grooves design and Combination of rib and lug design on shoulder ensure excellent heat dissipation and high speed performance

Provide outstanding resistance to irregular abrasion

With excellent water drainage and heat dispersion performance

With wide tread design to extend tire service life

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	K	152	149	3550	3250	930	930	293	1085	17
12.00R20	20PR	8.5	K	156	153	4000	3650	900	900	315	1125	17.5
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1084	16

818

Features & Benefits

3 continuous ribs, and the circumferential grooves enhances superior adhesion properties of the ground, excellent wet skid resistance, special tread design, providing a low heating up, wear resistance.

Design of big pattern block in the middle of tread provides good abrasion resistance.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12.00R24	20PR	8.5	K	160	157	4500	4125	900	900	315	1124	16
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1085	16
315/80R22.5	20PR	9.00	K	156	153	4000	3650	900	900	312	1076	16.5


169

Features & Benefits

Design of four consistent grooves and slant-edge pattern provide outstanding drainage and grip performance
 Widened tread to improves tire's abrasion resistance and longer tire mileage
 Design of unique steel disc helps to tire's heating dissipation and suitability for different wheels positions.



Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
9.5R17.5	18PR	6.75	M	143	141	2725	2575	930	930	240	842	12
7.50R16LT	16PR	6.00G	L	125	121	1500	1320	770	770	215	805	12
8.25R16LT	16PR	6.50H	L	128	124	1800	1600	770	770	235	855	13

928

Features & Benefits

Design of four consistent grooves and slant-edge pattern provide outstanding drainage and grip performance
 Design of Broader tire shoulder improves tire's abrasion resistance and longer tire mileage
 Special tire shoulder design, low heating formula to decrease shoulder heating, increase tire durable performance.
 Low rolling resistance, Save fuel consumption, and excellent handling performance.

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
275/70R22.5	16PR	8.25	M	144	141	3150	2900	900	900	276	958	14.5

6

Features & Benefits

Design of four consistent grooves and slant-edge pattern provide outstanding drainage and grip performance
 Design of Broader tire shoulder improves tire's abrasion resistance and longer tire mileage
 Special tire shoulder design, low heating formula to decrease shoulder heating, increase tire durable performance.
 Low rolling resistance, Save fuel consumption, and excellent handling performance.

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
315/80R22.5	20PR	9.00	K	156	153	4000	3650	900	900	312	1076	16.5

GT815

Features & Benefits

Good loading capacity, low rolling resistance and low noise

With excellent water drainage and skid resistance

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage

Excellent fuel efficiency.

Design of five pattern grooves provides better slip and wet resistance and safe handling.

Applicable Vehicle Model & Road condition




Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
385/65R22.5	20PR	11.75	K	160	158	4500	4125	900		389	1072	16

GT851A

Features & Benefits

Excellent traction performance ,water draining performance ,high speed running ,well loading capacity
 Design of five pattern grooves provides better slip and wet resistance and safe handling.

Applicable Vehicle Model & Road ondition

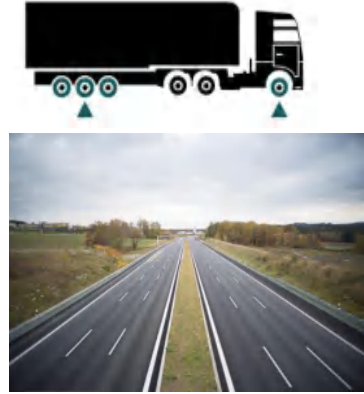

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
385/65R22.5	20PR	11.75	K	160	158	4500	4125	900		389	1072	16

586

Features & Benefits

Four consecutive main grooves and three auxiliary fine grooves to provide better drainage and grip performance
 Design of proper proportion for block and groove to provide better wear resistance performance;
 Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
385/65R22.5	20PR	11.75	K	160	158	4500	4125	900		389	1072	16

GT671

Features & Benefits

Big deep block provide strong traction and braking power.
 Open groove and bottom design given excellent self-cleaning performance
 Reinforced bead and body to strengthen the puncture resistance, tear resistance.



Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	J	152	149	3550	3250	930	930	293	1085	18.5
12.00R20	20PR	8.5	J	156	153	4000	3650	900	900	315	1125	23

615D

Features & Benefits

Deeper pattern with formulation of abrasion resistance and low heating performance for longer miles
 Open shoulder and block type pattern provides strong traction and gripping stress
 Open groove and bottom design given excellent self-cleaning performance
 Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	J	152	149	3550	3250	930	930	293	1085	19.5
12.00R20	20PR	8.5	J	156	153	4000	3650	900	900	315	1125	20

668

Features & Benefits

Design of wide rib grooves with lug grooves provides better water dispersion, improves driving and wetresisting performance
 Design of pattern blocks offers excellent traction performance.
 Open groove and bottom design given excellent self-cleaning performance
 Reinforced bead and body to strengthen the puncture resistance, tear resistance.
 Open shoulder and block type pattern provides strong traction and gripping stress.

Applicable Vehicle Model & Road ondition




Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	J	152	149	3550	3250	930	930	293	1085	18.5
12.00R20	20PR	8.5	J	156	153	4000	3650	900	900	315	1125	23

836

Features & Benefits

Design of wide rib grooves with lug grooves provides better water dispersion, improves driving and wetresisting performance
 Design of pattern blocks offers excellent traction performance.
 Tire adopt super structure, with excellent carrying capacity, super wear-resistant and anti- puncture performance
 Reinforced bead and body to strengthen the puncture resistance, tear resistance.
 Open shoulder and block type pattern provides strong traction and gripping stress.

Applicable Vehicle Model & Road ondition

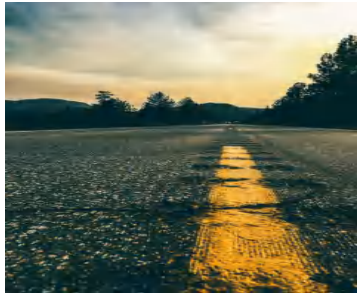

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	J	152	149	3550	3250	930	930	293	1085	18.5
12.00R20	20PR	8.5	J	156	153	4000	3650	900	900	315	1125	23

158

Features & Benefits

Special groove provides pattern self-cleaning performance and protect the bottom of groove;


Design of pattern blocks offers excellent traction performance and braking power ..

Tire adopt super structure, with excellent carrying capacity, super wear-resistant and anti-puncture performance

Special groove provides pattern self-cleaning performance and protect the bottom of groove;

Open shoulder and block type pattern provides strong tr

Applicable Vehicle Model & Road condition

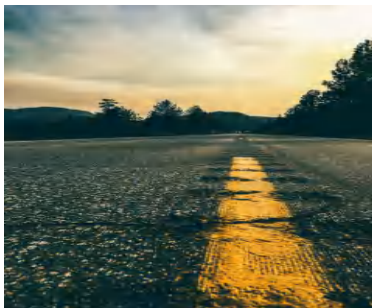

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11R22.5	16PR	8.25	L	146	143	3000	2725	830	830	279	1054	19
11R24.5	16PR	8.25	L	149	146	3250	3000	830	830	279	1104	19.5
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1085	20.5
295/80R22.5	18PR	9.00	L	152	149	3550	3250	900	900	298	1044	20.5
315/80R22.5	20PR	9.00	L	157	154	4000	3650	900	900	312	1076	20.5

159

Features & Benefits

Big block specially designed for snow road provides good control performance and abrasion resistance

Proper steel disc design provides good griping performance and wet and slip resistance when driving on snow road ,improves tire"s ice-breaking performance and driving safety

Ultra-wode tread provides better driving performance on the road

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
315/70R22.5	18PR	9.00	L	151	148	3750	3350	900	900	312	1014	24

803D

Features & Benefits

Special groove provides pattern self-cleaning performance and protect the bottom of groove;

Mixed pattern design provide excellent traction performance and braking power ..

Tire adopt super structure, with excellent carrying capacity, super wear-resistant and anti-puncture performance

Special groove provides pattern self-cleaning performance and protect the bottom of groove;

Widened tread improves tire grounded pressure, one-way pattern groove provides better driving performance and wet and s

Open shoulder improves tire's heat dissipation.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1084	20
295/80R22.5	18PR	9.00	L	152	149	3550	3250	900	900	298	1044	22
315/80R22.5	20PR	9.00	K	156	153	4000	3650	900	900	312	1076	22

GT816

Features & Benefits

Special groove provides pattern selfclean performance and protect the bottom of groove;

Mixed pattern design provide excellent traction performance and breaking power ..

Tire adopt super structure, with excellent carrying capacity, super wear-resistant and anti- puncture performance

Open shoulder improves tire's heat dissipation.

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12R22.5	18PR	9.00	K	152	149	3550	3250	930	930	300	1084	25

318

Features & Benefits

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage
Excellent fuel efficiency.

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
13R22.5	18PR	9.75	K	156	150	4000	3350	875	875	320	1124	17.5
315/80R22.5	20PR	9.00	K	156	153	4000	3650	900	900	312	1076	22

762

Features & Benefits

Optimized block patterns with wider longitudinal and transverse grooves, enable tires excellent traction performance. Excellent block and groove provides good abrasion resistance.

Unique belt structure, with high wear-resistance and low producing heat crown formulation. With strong grip and wet-slip resistance performance.

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
10.00R20	18PR	7.5	K	149	146	3250	3000	930	930	278	1054	18.5
11.00R20	18PR	8.0	K	152	149	3550	3250	930	930	293	1085	19
12.00R20	20PR	8.5	K	156	153	4000	3650	900	900	315	1125	20
13R22.5	18PR	9.75	K	154	151	3750	3450	830	830	320	1124	18.5
295/80R22.5	18PR	9.00	L	152	149	3550	3250	900	900	298	1044	18


625D



Features & Benefits

Open shoulder design, broader horizontal groove, provide powerful traction and grip
 High performance tire tread design, increase anti-abrasion performance
 Mixed pattern design provide excellent traction performance and breaking power ..
 Anti-stone structure design at the bottom of pattern groove, increase anti-puncture performance.

Applicable Vehicle Model & Road ondition

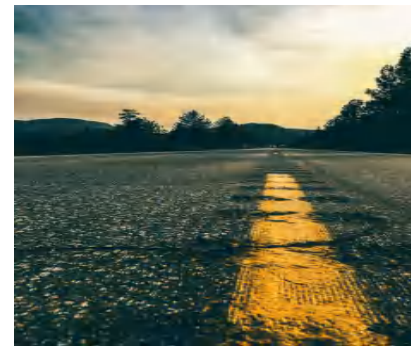

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11R22.5	16PR	8.25	L	146/143	143	3000	2725	830	830	279	1059	18
11R24.5	16PR	8.25	L	149/146	146	3250	3000	830	830	279	1110	20
295/75R22.5	16PR	9.00	L	146/143	143	3000	2725	830	830	298	1020	20
295/80R22.5	18PR	9.00	L	152/149	149	3550	3250	900	900	298	1044	18
315/80R22.5	20PR	9.00	K	156/153	153	4000	3650	900	900	312	1076	18

323

Features & Benefits

Big block patterns provides better driving performance and gripping stress on bad road
 Interlaced reinforcing rib design at the pattern block bottom provides better tear resistance and anti-puncturing performance
 With strong ground grip, good self-cleaning, good standing wear and high in loading ability

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	F	152	149	3550	3250	930	930	293	1096	24
12.00R20	20PR	8.5	F	156	153	4000	3650	900	900	315	1136	24.5

333

Features & Benefits

Interlaced reinforcing rib design at the pattern block bottom provides better tear resistance and anti-puncturing performance;
 Stone emitter at the bottom of grooves protects tire carcass effectively.

Improved traction, driving and braking performance

With strong ground grip, good self-cleaning, good standing wear and high in loading ability

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	J	152	149	3550	3250	930	930	293	1096	24
12.00R20	20PR	8.5	J	156	153	4000	3650	900	900	315	1136	24

839



Features & Benefits

Interlaced reinforcing rib design at the pattern block bottom provides better tear resistance and anti-puncturing performance; Stone emitter at the bottom of grooves protects tire carcass effectively.

Improved traction, driving and braking performance

With strong ground grip, good self-cleaning, good standing wear and high in loading ability

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12.00R20	20PR	8.5	F	156	153	4000	3650	900	900	315	1136	25

368D



Features & Benefits

Interlaced reinforcing rib design at the pattern block bottom provides better tear resistance and anti-puncturing performance; Stone emitter at the bottom of grooves protects tire carcass effectively.

Improved traction, driving and braking performance

With strong ground grip, good self-cleaning, good standing wear and high in loading ability

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	F	152	149	3550	3250	930	930	293	1096	25
12.00R20	20PR	8.5	F	156	153	4000	3650	900	900	315	1136	25

Features & Benefits

Suitable for all position of trucks running on/off road
High traction

Applicable Vehicle Model & Road ondition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Tread Depth
				S	D	S	D	S	D	
750R16LT	8PR	6.00G	M	122	118	1500	1320	770	770	15