



CATALOGUE

This version is applied for BACH HO PCS.,LTD only.

With special design and compound for only use of road tractor, trailer or semi-trailer.



GT615

Features & Benefits

Deeper pattern with formulation of abrasion resistance and low heating performance for longer miles
 Open shoulder and block type pattern provides strong traction and gripping stress
 Open groove and bottom design given excellent self-cleaning performance
 Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	L	152	149	3550	3250	930	930	293	1085	17.5
12.00R20	20PR	8.5	L	156	153	4000	3650	900	900	315	1125	18.5

This version is applied for BACH HO PCS., LTD only


GT665



Features & Benefits

Open shoulder design, broader horizontal groove, provide powerful traction and grip
 High performance tire tread design, increase anti-abrasion performance
 Mixed pattern design provide excellent traction performance and braking power ..
 Anti-stone structure design at the bottom of pattern groove, increase anti-puncture performance.

Applicable Vehicle Model & Road condition

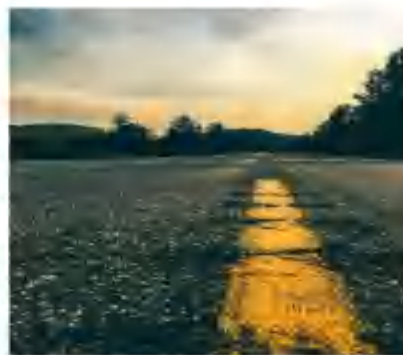

Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11R22.5	16PR	8.25	L	146/143	143	3000	2725	830	830	279	1050	18
13R22.5	18PR	9.75	L	154	151	3750	3450	830	830	320	1124	21

This version is applied for BACH HO PCS.,LTD only

GT666



Features & Benefits

Special groove provides pattern self-cleaning performance and protect the bottom of groove;
Mixed pattern design provide excellent traction performance and braking power ..

Tire adopt super structure, with excellent carrying capacity, super wear-resistant and anti-puncture performance

Special groove provides pattern self-cleaning performance and protect the bottom of groove;

Widened tread improves tire grounded pressure, one-way pattern groove provides better driving performance and wet

Open shoulder improves tire's heat dissipation.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1084	19
295/80R22.5	18PR	9.00	L	152	149	3550	3250	900	900	298	1044	19.5
315/80R22.5	20PR	9.00	L	156	150	4000	3350	850	850	312	1082	19

This version is applied for BACH HO PCS.,LTD only

GT667

Features & Benefits

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mile
Excellent fuel efficiency.



Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12R22.5	18PR	9.00	L	152	149	3550	3250	930	930	300	1094	19
13R22.5	18PR	9.75	L	154	151	3750	3450	830	830	320	1124	20
295/80R22.5	18PR	9.00	L	152	149	3550	3250	900	900	298	1044	19.5
315/80R22.5	20PR	9.00	L	156	150	4000	3350	850	850	312	1076	19

This version is applied for BACH HO PCS.,LTD only

GT668

Features & Benefits

Design of wide rib grooves with lug grooves provides better water dispersion, improves driving and wet resisting performance

Design of pattern blocks offers excellent traction performance.

Open groove and bottom design given excellent self-cleaning performance

Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Open shoulder and block type pattern provides strong traction and gripping stress.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	L	152	149	3550	3250	930	930	293	1085	17.5
12.00R20	20PR	8.5	L	156	153	4000	3650	900	900	315	1125	18.5

This version is applied for BACH HO PCS.,LTD only

GT669

Features & Benefits

Design of wide rib grooves with lug grooves provides better water dispersion, improves driving
Design of pattern blocks offers excellent traction performance.

Open groove and bottom design given excellent self-cleaning performance

Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Open shoulder and block type pattern provides strong traction and gripping stress.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
10.00R20	18PR	7.5	L	149	146	3250	3000	930	930	278	1054	20
11.00R20	18PR	8.0	L	152	149	3550	3250	930	930	293	1085	20.5
12.00R20	20PR	8.5	L	156	153	4000	3650	900	900	315	1125	18.5
13R22.5	18PR	9.75	K	154	151	3750	3450	830	830	320	1124	21

This version is applied for BACH HO PCS.,LTD only

GT817

Features & Benefits

Four consecutive main grooves and three auxiliary fine grooves provide outstanding drainage and grip performance.

Provide excellent anti-sideslipping performance and ensure excellent water evacuation

Deliver outstanding traction and handling

Improved tread design, High wear resistance and eccentric wear resistance.

Low rolling resistance, Save fuel consumption.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	L	152	149	3550	3250	930	930	293	1085	17
11R22.5	18PR	8.3	M	149	146	3250	3000	930	930	279	1054	14.5
12R22.5	18PR	9.00	M	152	149	3550	3250	930	930	300	1084	15
295/80R22.5	18PR	9.00	M	152	149	3550	3250	900	900	298	1044	14.5
315/80R22.5	20PR	9.00	M	156	153	4000	3350	850	850	312	1076	14.5

This version is applied for BACH HO PCS.,LTD only

GT818

Features & Benefits

3 continuous ribs, and the circumferential grooves enhances superior adhesion properties of the ground, excellent wet skid resistance, special tread design, providing a low heating up, wear resistance.

Design of big pattern block in the middle of tread provides good abrasion resistance.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12R22.5	18PR	9.00	M	152	149	3550	3250	930	930	300	1084	15

This version is applied for BACH HO PCS.,LTD only

GT819

Features & Benefits

Provide excellent anti-sideslipping performance and ensure excellent water evacuation

Deliver outstanding traction and handling

Irregular abrasion and cutting resistance compound to achieve longer mileage

Provide excellent heat dissipation and high speed performance

With good performance in anti-cracking and tear resistance

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12.00R24	20PR	8.5	K	160	157	4500	4125	900	900	315	1226	14.5

This version is applied for BACH HO PCS.,LTD only

GT831

Features & Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Irregular abrasion and cutting resistance compound to achieve longer mileage
- Provide excellent heat dissipation and high speed performance
- With good performance in anti-cracking and tear resistance

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
10.00R20	18PR	7.5	K	149	146	3250	3000	930	930	278	1054	16
11.00R20	18PR	8.0	L	152	149	3550	3250	930	930	293	1085	17
12.00R20	20PR	8.5	L	156	153	4000	3650	900	900	315	1125	16
12.00R24	20PR	8.5	K	160	157	4500	4125	900	900	315	1226	14.5
11R22.5	18PR	8.25	M	149	146	3250	3000	930	930	279	1054	14.5
11R24.5	16PR	8.25	L	149	146	3250	3000	830	830	279	1104	15
12R22.5	18PR	9.00	M	152	149	3550	3250	930	930	300	1084	15
13R22.5	18PR	9.75	M	154	151	3750	3450	830	830	320	1124	21
315/80R22.5	20PR	9.00	M	156	150	4000	3350	850	850	312	1076	14.5

This version is applied for BACH HO PCS.,LTD only

GT832

Features & Benefits

Provide excellent anti-sideslipping performance and ensure excellent water evacuation

Deliver outstanding traction and handling

Irregular abrasion and cutting resistance compound to achieve longer mileage

Provide excellent heat dissipation and high speed performance

With good performance in anti-cracking and tear resistance

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
12.00R24	20PR	8.5	K	160	157	4500	4125	900	900	315	1226	14.5

This version is applied for BACH HO PCS.,LTD only

GT836

Features & Benefits

Provide excellent anti-sideslipping performance and ensure excellent water evacuation

Deliver outstanding traction and handling

Irregular abrasion and cutting resistance compound to achieve longer mileage

Provide excellent heat dissipation and high speed performance

With good performance in anti-cracking and tear resistance

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	L	152	149	3550	3250	930	930	293	1085	17
12.00R20	20PR	8.5	L	156	153	4000	3650	900	900	315	1125	16
12R22.5	18PR	9.0	M	152	149	3550	3250	930	930	300	1084	15

This version is applied for BACH HO PCS.,LTD only

GT851

Features & Benefits

Excellent traction performance ,water draining performance ,high speed running ,well loading capacity
Design of five pattern grooves provide better slip and wet resistance as well as safe handling.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
385/65R22.5	20PR	11.75	K	160	158	4500	4125	900		389	1072	16

This version is applied for BACH HO PCS.,LTD only

GT859

Features & Benefits

Four consecutive main grooves and three auxiliary fine grooves to provide better drainage and grip performance
 Design of proper proportion for block and groove to provide better wear resistance performance;
 Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
385/65R22.5	20PR	11.75	K	160	158	4500	4125	900		389	1072	16

This version is applied for BACH HO PCS.,LTD only

GT933

Features & Benefits

Interlaced reinforcing rib design at the pattern block bottom provides better tear resistance and anti-puncturing performance.
 Stone emitter at the bottom of grooves protects tire carcass effectively.
 Improved traction, driving and braking performance.
 With strong ground grip, good self-cleaning, good standing wear and high in loading ability.

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	F	152	149	3550	3250	930	930	293	1095	23
12.00R20	20PR	8.5	F	156	153	4000	3650	900	900	315	1135	23.5

This version is applied for BACH HO PCS.,LTD only

GT939



Features & Benefits

Enterlaced reinforcing rib at the pattern block provides better tear resistance

Stone emitter at the bottom of grooves protects tire carcass effectively.

Improved traction, driving and braking performance

With strong ground grip. good self-cleaning, good standing wear and high in loading ability

Applicable Vehicle Model & Road condition



Size	Ply	Standard Rim	Speed Rating	Load Index		Max Load(kg)		Pressure (kpa)		Inflated Dimension(mm)		Tread Depth
				S	D	S	D	S	D	Section Width	Overall Diameter	
11.00R20	18PR	8.0	F	152	149	3550	3250	930	930	293	1085	23
12.00R20	20PR	8.5	F	156	153	4000	3650	900	900	315	1135	23.5

This version is applied for BACH HO PCS.,LTD only